




Wiring the HP250DBL

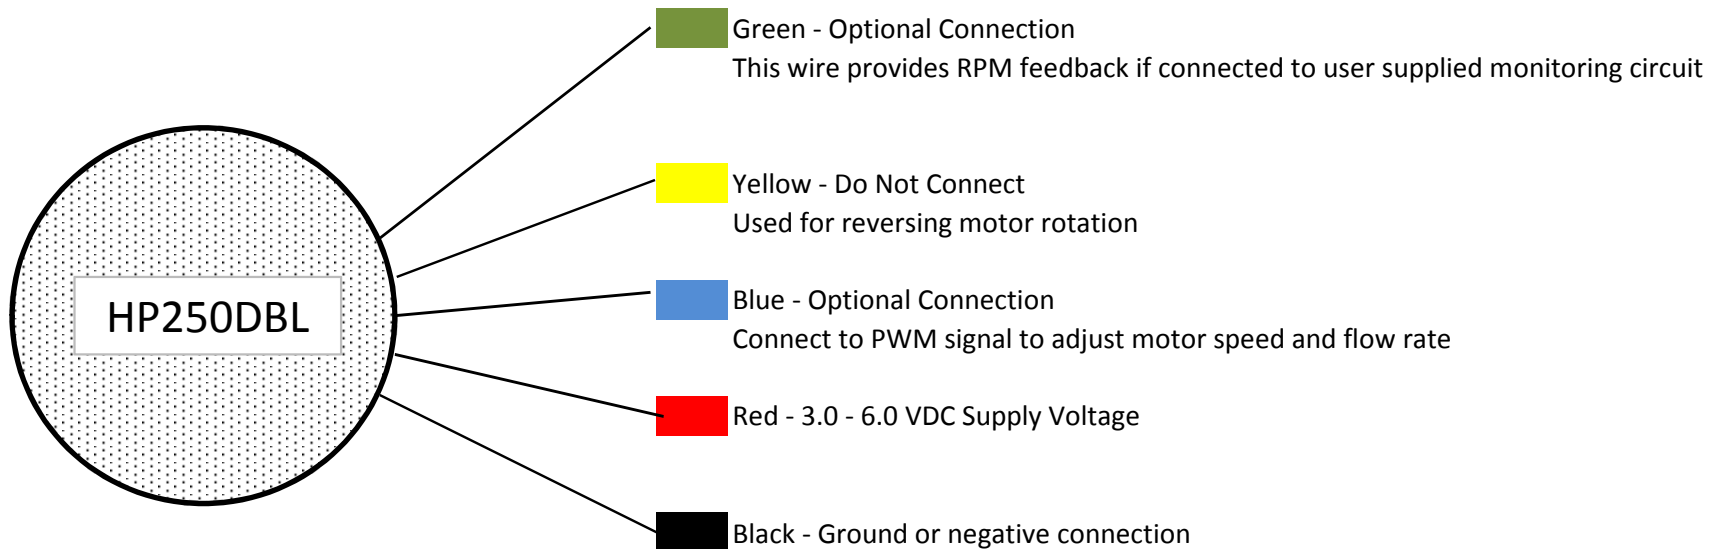

Note: The HP250DBL will operate on any DC voltage source between 3.0 and 6.0 VDC. Pumping rate can be adjusted by varying input voltage between 3.0 and 6.0 VDC or by using a PWM signal on the blue wire.