




# Wiring the HP250DBL

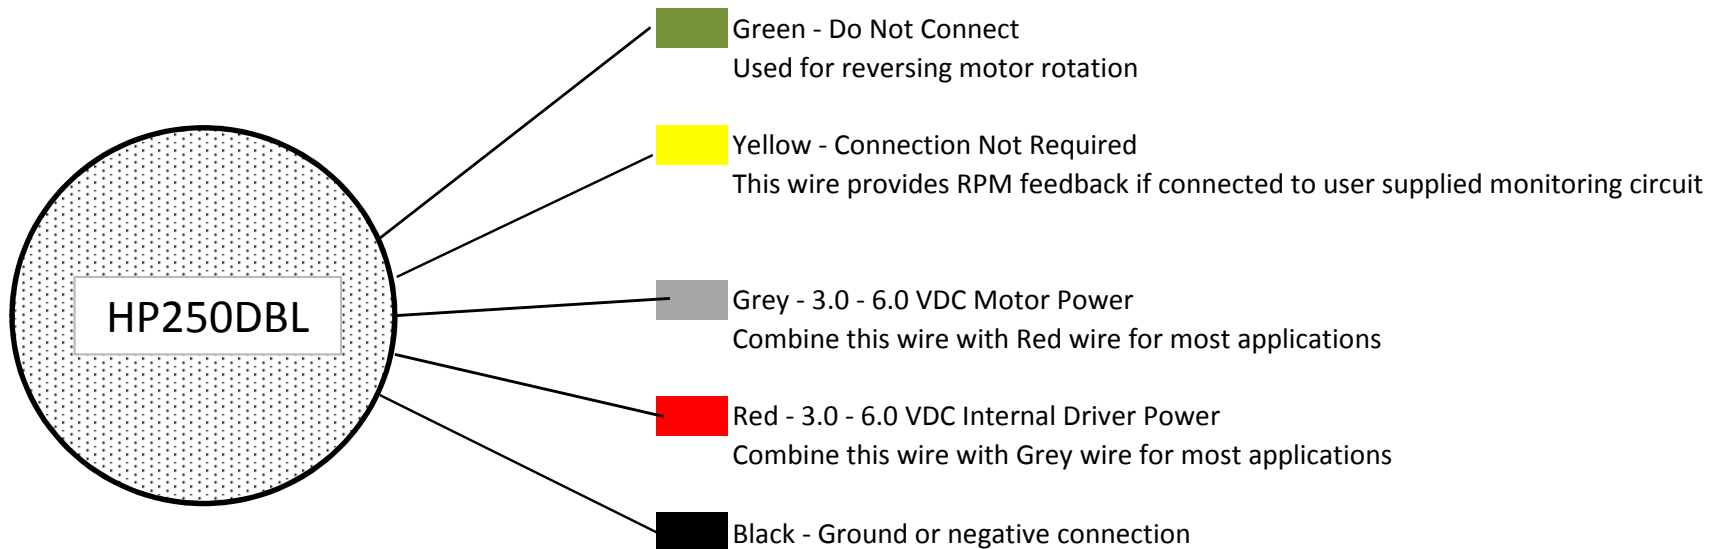

Note: The HP250DBL will operate on any DC voltage source between 3.0 and 6.0 VDC. Pumping rate can be adjusted by varying input voltage between 3.0 and 6.0 VDC.

The simplest connection is combine red and grey together with positive side of supply voltage and black to the negative side of the supply voltage.