





Wiring the HP400S for a fixed speed

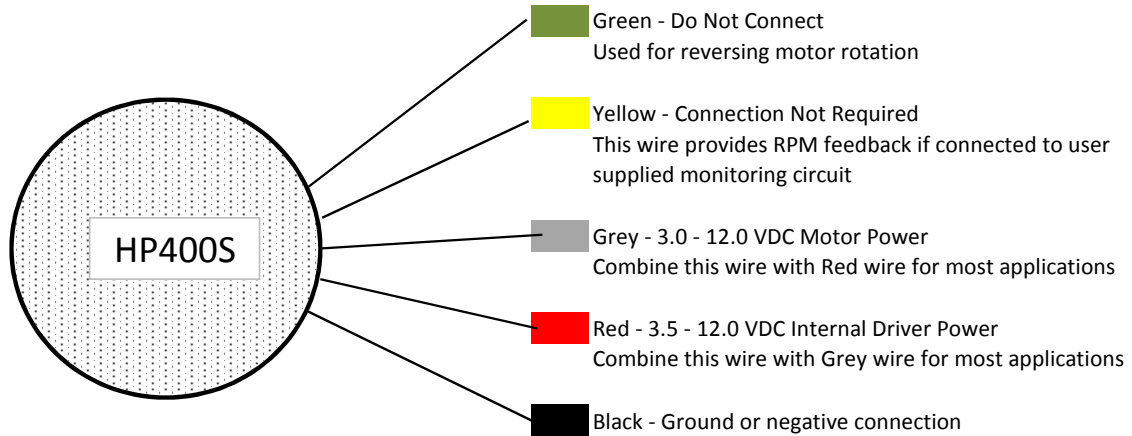

Note: The HP400S will operate on any DC voltage source between 3.5 and 12.0 VDC

Wiring the HP400S for variable speed using our VVR-1

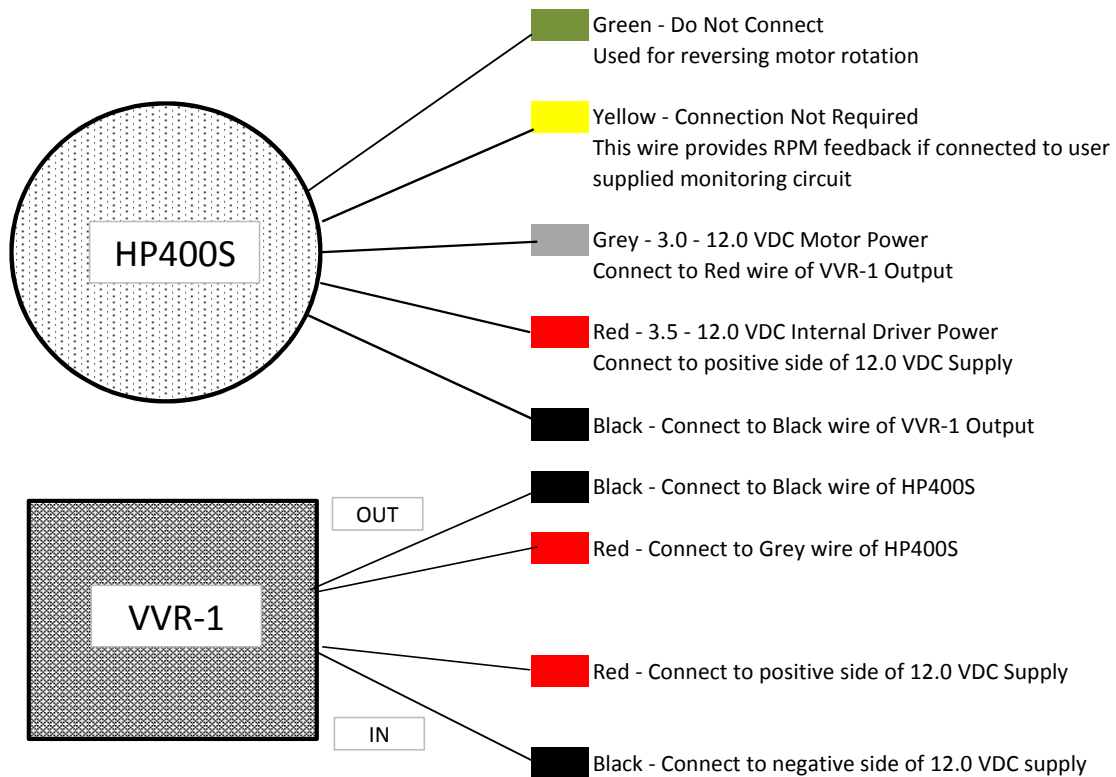

The speed (flow rate and pump pressure) adjustment screw can be found on the underside of the VVR-1. It is a small gold screw located on the blue potentiometer. Turning the screw clockwise will lower pump speed.